


soli::lyser

soli::lyser monitors TSS or MLSS

- s::can plug & measure
- measuring principle: optical (infrared absorbance)
- ideal for waste water
- long term stable and maintenance free in operation
- factory precalibrated (2 measuring ranges available)
- automatic cleaning with compressed air
- mounting and measurement directly in the media (InSitu) or in a flow cell
- operation via s::can terminals & s::can software
- minimal maintenance (no waste parts)
- most cost efficient sensor, cost of ownership are unmatched

recommended accessories

part number	article name
D-330-xxx	con::cube V3
D-320-xxx	con::lyte
F-11-oxi-ammo	carrier oxi::lyser / soli::lyser / s::can ISE probes
F-48-oxi	oxi::lyser or soli::lyser flow-cell (by-pass setup), PVC
C-210-sensor	10 m extension cable for s::can physical probes and s::can ISE probes
B-44	cleaning valve
B-44-2	

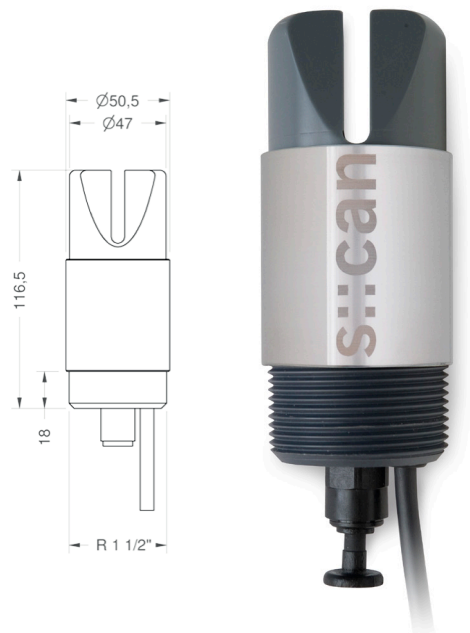

technical specification

measuring principle	optical	power consumption (max.)	0.32 W
measuring principle detail	infrared (880nm)	interface to s::can terminals	sys plug (IP67), RS485
measuring range application	0.25 ... 30 g/l TSS/MLSS (E-505-1-075) 0 ... 1500 mg/l TSS (E-505-2-075)	cable length	10 m
resolution	10 mg/l between 1000 and 9999 mg/l 100 mg/l above 10 g/l 1 mg/l below 1000mg/l	cable type	22 AWG, polyurethane jacket
accuracy	TSS/MLSS: +/- 100 mg/l or +/- 5 %* (E-505-1-075) TSS: +/- 2 mg/l or +/- 5 %* (E-505-2-075) (*whichever is greater)	housing material	epoxy, stainless steel
repeatability	± 1 %	weight (min.)	540 g
automatic compensation instrument	temperature	dimensions (Ø x l)	51 x 117 mm
response time (T90)	60 ... 0 sec.	operating temperature	0 ... 60 °C
integration via	con::lyte con::nect	operating pressure	0 ... 6.8 bar
power supply	6 ... 16 VDC	installation / mounting	submersed or in a flow cell
		process connection	R 1 1/2"
		ingress protection class	IP68
		automatic cleaning	media: compressed air or autobrush permissible pressure: 2 ... 4.5 bar
		storage temperature (sensor)	0 ... 60 °C
		conformity - EMC	EN 50081-2, EN55011
		conformity - safety	EN 61000-4, EN61010-1
		standard guarantee	1 years
		extended guarantee (optional)	3 years

measuring range

		parameter	part number
soli::lyser (TSS)	min.	TSS [mg/l] 0	E-505-2-075
	max.	1500	
soli::lyser (TSS)	min.	250	E-505-1-075
	max.	30000	